


MATERIALS BUYER'S GUIDE

True Production-Grade Materials for Figure 4

How to Evaluate Additive Manufacturing
Materials for Production

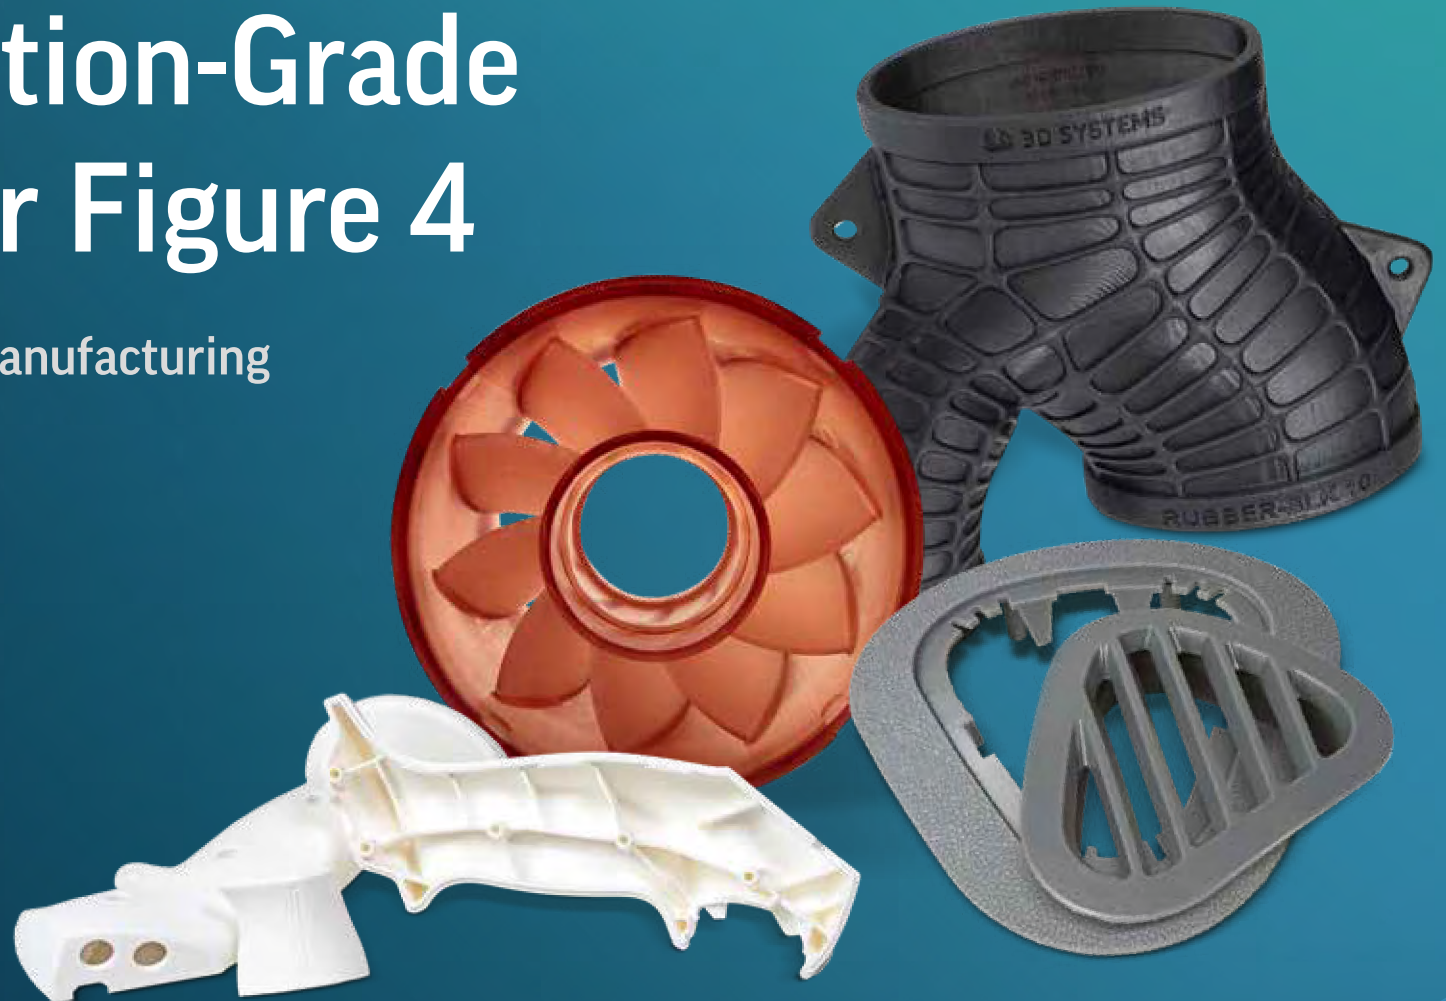

Contents

<u>3</u>	Introduction
<u>8</u>	Production
<u>9</u>	Rigid
<u>15</u>	Transparent
<u>16</u>	Durable
<u>17</u>	Rubber
<u>19</u>	High Thermal Resistance
<u>20</u>	Flame Retardant
<u>23</u>	Biocompatible
<u>26</u>	Indirect Production
<u>27</u>	Molding
<u>29</u>	Casting
<u>30</u>	Prototyping
<u>31</u>	Functional Prototyping
<u>32</u>	Design Verification
33	Contact Us
34	Appendix



Figure 4

Figure 4® is an ultra-fast projection-based additive manufacturing (AM) technology designed to help users seamlessly transition from prototyping to production.

Available in different configurations that vary in footprint, capacity, and versatility, Figure 4 uses a non-contact membrane to combine accuracy and amazing detail fidelity with fast print speeds. Together with its quick post-processing, Figure 4 is a workhorse solution for a variety of applications across industries, at any stage.

Yet going from prototype to production is a multi-step process. Finding the right approach to move from design verification, to functional prototyping, to end-use parts requires the convergence of multiple variables. Beyond part accuracy, repeatability, and operational costs, suitable materials are paramount.



What's Different About Figure 4 Production-Grade Materials

A major stigma around Additive Manufacturing (AM) materials has been the belief that they are brittle and only have reliable mechanical properties for short periods of time. These perceptions have posed a hurdle to adoption, and are something the 3D printing industry has struggled with for years.

Now that advancements in part quality, speed, and cost are moving AM technology beyond prototyping and into production, it is necessary for AM materials to level-up as well. To do this, the right material properties, performance, and testing standards are necessary. 3D Systems recognizes this, and we have adapted our approach to material property and performance testing as well as our datasheets for Figure 4 production materials.

We are proud to provide our users with comprehensive information in a consistent format to enable you to effectively evaluate our production additive materials for your specific application(s). To ensure data integrity, all of our Figure 4 production materials data is tested and conditioned per ASTM and ISO requirements.



Consistent and Comprehensive Testing

Within the Production Materials section of this document, you will find material performance highlights of our Figure 4 production-grade materials. If viewing this document digitally, you will also be able to navigate to the complete material datasheets of any material you are interested in exploring further.

Each Figure 4 production material datasheet provides clear and separate reports on the following measures, as relevant:

- Mechanical, thermal, and electrical properties (including flammability, dielectric properties, and 24-hour water absorption);
- Isotropic properties;
- Long-term indoor and outdoor environmental stability;
- Chemical and automotive fluid compatibility;
- Biocompatibility.



A Word from Our Materials Development Team

“It’s up to the design engineer to decide how well a given material will work for a given application, that’s why our datasheets include all the data we tested, and not just the most impressive results. We want our users to be able to quickly and confidently identify the right choice for their project.

When I look at these datasheets, some of the places I look right away are the elongation of yield and the tensile modulus in the long-term environmental stability section. If my elongation is flat, I have not gone brittle. If my tensile modulus is flat, I have not gotten stiff. Heat Deflection Temperature (HDT) is also an important data point to pay attention to and indicates how well a part will withstand heat exposure for things as routine as transportation conditions to more intense aspects of production such as sterilization in an autoclave.

We also tested each of our production-grade materials in a range of common build orientations to provide early visibility into the relationship of part orientation to part performance. Our goal in how we tested and documented these materials was to equip design engineers with as much upfront data as possible to help them get the most out of these capabilities. These datasheets are packed with information, because we want to help our users make informed decisions.”

Martin Johnson

Vice President, Product, Technical Fellow, 3D Systems

Mechanical Properties

The full suite of mechanical properties included in our Figure 4 production materials datasheets are given per industry standards such as ASTM and ISO test standards. Additional properties provided include flammability, dielectric properties, and 24-hour water absorption. This allows for better understanding of the material capability to aid in design decisions for each material. All parts are conditioned per ASTM recommended standards for a minimum of 40 hours at 23 °C, 50% RH.

Solid material properties reported reflect printing along the vertical axis (ZY-orientation). Figure 4 material properties are relatively uniform across print orientations, as detailed within each specific section on isotropic properties. Because of this, parts for most materials do not need to be oriented in a particular direction to exhibit these properties.

LONG-TERM ENVIRONMENTAL STABILITY

Material stability has been a big hurdle for AM. To combat conventional expectations, 3D Systems has conducted extensive testing on its Figure 4 production materials to demonstrate stability as far out as eight years from production. Our testing shows we can now produce parts that last.

Indoor stability was tested per the ASTM D4329 standard method; outdoor stability was tested per the ASTM G154 standard method.

CHEMICAL AND AUTOMOTIVE FLUID COMPATIBILITY

Exposure to hydrocarbons and cleaning chemicals is a routine part of many applications. Our Figure 4 production-grade materials were therefore tested for sealed and surface contact compatibility per ASTM D543 test conditions and per USCAR2 test conditions. In addition to the tensile strength (MPa) results included within this document, the full datasheets include data tables for tensile modulus, elongation at break, and notched impact strength.

MATERIALS FROM PROTOTYPING TO PRODUCTION

3D Systems' Figure 4 platform spans the prototyping to production workflow, and our materials portfolio is likewise divided by application. As a comprehensive guide to all of our Figure 4 materials, this document includes all classes of Figure 4 materials, including:

- Production materials for direct production parts (pages 8-16);
- Indirect production materials for multi-stage production processes (pages 23-25);
- Prototyping materials for general purpose prototypes and functional testing (pages 26-29).










Production



Figure 4[®] PRO-BLK 10

Long-term indoor & outdoor environmental stability

PROPERTIES:

-  Exhibits thermoplastic behavior in necking at tensile break point
-  Fast print speed up to 62 mm/hr at 50 micron layer thickness
-  >70 °C heat deflection temperature
-  12% elongation at break
-  Durability and strength
-  UL 94 HB flammability
-  Biocompatible capable per ISO 10993-5 and 10993-10

No secondary thermal cure required; simple, solvent cleaning.

[Get the full datasheet for Figure 4 PRO-BLK 10 here](#)

GOOD FOR:

- Alternative to injection molding or cast urethane processes
- Motor housings, connectors, snap-fits
- Other general-use production parts



Figure 4[®] Rigid White

Long-term environmental stability and long-lasting clean opaque white color

PROPERTIES:

- Exhibits thermoplastic behavior in necking at tensile break point
- Fast print speed up to 47 mm/hr at 50 micron layer thickness
- 65 °C heat deflection temperature
- 20% elongation at break
- Durability and strength
- UL 94 HB flammability
- Biocompatible capable per ISO 10993-5 and 10993-10

No secondary thermal cure required; simple, solvent cleaning.

[Get the full datasheet for Figure 4 Rigid White here](#)

GOOD FOR:






- Handles and fixtures for medical applications that require biocompatibility
- Electronics enclosures and small components or parts for devices
- Motor housings, covers, guards, snap-fit parts, jigs, fixtures and other functional prototypes and low volume production plastic parts



Figure 4[®] Rigid Composite White

High stiffness, rigid parts

PROPERTIES:

-  Longterm indoor and outdoor stability (retaining > 90 % of its tensile modulus)
-  Smooth surface finish and low-cost post-processing
-  Excellent thermal resistance for environments with elevated operating temperatures
-  Highest flexural modulus in its class (over 10,000 MPa)
-  Excellent resistance to automotive fluids and chemicals

GOOD FOR:

- Wind tunnel testing
- Automotive parts
- Motorsports parts
- Small format, short-run tools, jigs, and fixtures
- Parts exposed to automotive fluids and chemicals

No secondary thermal cure required; simple, solvent cleaning.









[Get the full datasheet for Figure 4 Rigid Composite White here](#)



Figure 4[®] Rigid Gray

High contrast gray plastic for long-term use parts with balanced thermal and mechanical properties

PROPERTIES:

-  Long-term indoor and outdoor environmental stability of mechanical properties and color; tested out to 8 and 1.5 years (respectively) per ASTM methods
-  Tensile testing shows thermoplastic behavior with necking at break
-  72°C heat deflection temperature at 0.455MPa
-  30% elongation at break
-  2200MPa flexural modulus
-  UL 94 HB flammability
-  Biocompatible capable per ISO 10993-5 and ISO10993-5
-  Fast print speed up to 48 mm/hr at 50-micron layer thickness

GOOD FOR:

- Static rigid production components like housings and covers
- Small parts requiring detail and accuracy for consumer products and general use
- Parts requiring painting, plating, and laser-etching
- Functional prototyping and low volume production parts where visualization of features is critical











No secondary thermal cure required; simple, solvent cleaning.

[Get the full datasheet for Figure 4 Rigid Gray here](#)

Figure 4[®] Tough 60C White

White plastic for long-term use parts with a good combination of impact strength, elongation, and tensile strength properties

PROPERTIES:

-  Long-term indoor and outdoor environmental stability of mechanical properties and color; tested out to 8 and 1.5 years (respectively) per ASTM methods
-  Biocompatible-capable per ISO10993-5 and ISO10993-10
-  65 °C heat deflection temperature at 0.455MPa
-  23% elongation at break
7.1% elongation at yield
-  34 J/m notched impact strength
-  1500 MPa tensile modulus
-  UL 94 HB flammability
-  Sterilization through autoclave

GOOD FOR:

- Clinical trials and medical devices such as tools, handles, and small plastic parts
- Load-bearing parts such as handles, cranks, knobs, and levers
- Structural parts like brackets, snap-fits, and custom fasteners
- Small parts requiring detail and accuracy in consumer products, wearable devices, and general use
- Functional prototyping and biocompatible end-user parts











No secondary thermal cure required; simple, solvent cleaning.

[Get the full datasheet for Figure 4 Tough 60C White here](#)

Figure 4[®] Tough 65C Black

Black plastic for long-term use parts with a good combination of impact strength, elongation, and tensile strength properties

PROPERTIES:

-  Long-term indoor and outdoor environmental stability of mechanical properties; tested out to 8 and 1.5 years (respectively) per ASTM methods
-  70 °C heat deflection temperature at 0.455MPa
-  35% elongation at break
-  6.6% elongation at yield
-  31 J/m notched impact strength
-  41 MPa tensile strength
-  Biocompatible capable per ISO10993-5
-  UL 94 HB flammability

No secondary thermal cure required; simple, solvent cleaning.

[Get the full datasheet for Figure 4 Tough 65C Black here](#)

GOOD FOR:





- Load-bearing parts such as handles, cranks, knobs, and levers Structural parts like brackets, snap-fits, and custom fasteners
- Small parts requiring detail and accuracy for consumer products, sporting goods, and general use
- Latching and board connectors for data devices and white goods
- Sensor holders and guides



Figure 4[®] Tough Clear

A Clear, Production-Grade Material Offering Long-Term Stability and Clarity

PROPERTIES:

-  High-light transmittance and durable clarity
-  Ultimate Tensile Strength: ~50 MPa (ASTM D638)
-  Flexural modulus of around 2.0–2.3 GPa for strong resistance to bending loads
-  Tensile modulus of approx. 1.8–2.1 GPa (measured per ASTM D638) for ideal level of stiffness

GOOD FOR:

- End-use manufacturing of high volume, small plastic parts
- Load-bearing handles, cranks, knobs, and levers
- Structural brackets, snap-fits, and fasteners
- Lighting covers, cases, reflectors, and light guides
- Fast-moving consumer goods and consumer packaging

No secondary thermal cure required; simple, solvent cleaning.





[Get the full datasheet for Figure 4 Tough Clear here](#)



Figure 4[®] FLEX-BLK 20

Long-term indoor & outdoor environmental stability

PROPERTIES:

-  76% elongation at break
-  91 J/m notched impact strength
-  UL 94 HB flammability
-  Long-term environmental stability

Fatigue-resistant black plastic with look and feel of production polypropylene.

[Get the full datasheet for Figure 4 FLEX-BLK 20 here](#)

GOOD FOR:







- Housings, brackets, covers, and fixtures
- Functional assemblies and prototypes
- Automotive styling parts
- Consumer goods and electronic components
- Containers and enclosures
- Concept and marketing models



Figure 4[®] RUBBER-65A BLK

Long-term environmental stability + high elongation at break

PROPERTIES:

-  Shore-A of 65 (medium hard rubber)
-  8.5 kN/m tear strength printed
Type-C printed vertically on Z-axis
-  High elongation at break (125% XZ)
-  UL 94 HB flammability
-  Long-term environmental stability
-  Biocompatible capable per
ISO 10993-5 and 10993-10

GOOD FOR:

- Seals and housings
- Vibration dampeners and pipe spacers
- Air/dust gaskets
- Bumpers
- Grips and handles








Engineered for long-term environmental stability.

[Get the full datasheet for Figure 4 RUBBER-65A BLK here](#)

Figure 4[®] RUBBER-BLK 10

Long-term environmental stability + high tear strength

PROPERTIES:

-  Shore hardness of 59D and 97A
-  125 J/m notch impact
-  76 kN/n tear strength printed Type-C
-  Long-term environmental stability
-  Biocompatible capable per ISO 10993-5 and 10993-10

Engineered for long-term environmental stability.

[Get the full datasheet for Figure 4 RUBBER-BLK 10 here](#)

GOOD FOR:





- Strain relief applications
- Couplings and overmoldings
- Slow-rebound, hard-rubber touch applications, such as grips, handles, bumpers, etc.



Figure 4[®] HI TEMP 300-AMB

Rigid plastic for ultra-high heat environments

PROPERTIES:

-  >300 °C heat deflection temperature at 0.455 and 1.82 MPa
-  High tensile modulus (4000MPa)
-  10J/m notched impact strength
-  Rigid and translucent

No secondary thermal cure required; excellent visualization for internal features and fluid flow performance.

[Get the full datasheet for Figure 4 HI TEMP 300-AMB here](#)

GOOD FOR:

- HVAC, consumer appliances, motor enclosures, and other test or end-use components requiring high heat resistance
- Low pressure molding/tooling
- Overmolding

Additional materials with high thermal resistance:

Figure 4 MED-AMB 10

Figure 4 MED-WHT 10

Figure 4 Rigid 150C FR Black








Figure 4 Tough 75C FR Black



Figure 4[®] High Temp 150C FR Black

UL94 V0 rated flame-retardant black plastic with >150°C heat deflection temperature

PROPERTIES:

-  Passes UL94 V0 test standards @ 2 mm and 3 mm thickness
-  Passes FAR Part 25.853 @ 12-second vertical burn and HB testing @ 3 mm thickness
-  Passes FAR Part 23.853 @ 12-second vertical burn and HB testing @ 3 mm thickness
-  Passes UL 746C GWIT and GWFI @ 2 mm and 3 mm thickness
-  150° C heat deflection temperature at 0.455MPa
-  2900 MPa flexural modulus
-  Long-term indoor and outdoor environmental stability of mechanical properties; tested out to 8 and 1.5 years (respectively) per ASTM methods

GOOD FOR:

- Printed circuit board covers
- Electrical and under-hood housings requiring UL94 V0 rating
- Rigid covers, hangers, and brackets
- Small FAR 25/23.853 in-cabin parts
- Flame retardant parts for trains and buses



No secondary thermal cure required; simple, solvent cleaning.

[Get the full datasheet for Figure 4 High Temp 150C FR Black here](#)

Figure 4[®] Tough 75C FR Black

Precision and performance, UL94 V0 rated flame-retardant resin

PROPERTIES:

- UL 94 V0 flame rating at ultra-thin 0.4mm thickness
- Exceptional heat & electrical properties, including GWI 800°C & CTI 600V
- Passes FAR 25.853 60 second burn test at 1 mm thickness
- RTI Electrical @ 150°C, ensuring long-term reliability
- Tough and durable with 7.8% elongation at break
- Fine feature resolution, perfect for precision applications

GOOD FOR:

- Thin-wall connectors and components
- Direct production of plastic connectors
- Electrical boxes, covers, and housings
- Printed circuit board assemblies (PCBA)
- Housings, brackets, and sensor casings









No secondary thermal cure required; simple, solvent cleaning.

[Get the full datasheet for Figure 4 Tough 75C FR Black here](#)

Figure 4[®] Tough FR V0 Black

Proven Performance in Extreme Conditions

PROPERTIES:

-  Passes UL94 V0 test standards @ 2 mm and 3 mm thickness
-  Passes FAR Part 25.853 (a) @ 3 mm thickness
-  Exceptionally high elongation at break @ ~35–44%, depending on orientation
-  Strong chemical/fluid resistance
-  ~1 GPa flexural modulus
-  Long-term indoor and outdoor environmental stability of mechanical properties; tested out to 8 and 1 years (respectively) per ASTM methods

GOOD FOR:

- Aircraft electrical connectors, knobs, grommets, and spacers
- End-use manufacturing of high-volume, small plastic parts
- Printed circuit board covers
- Electrical and under-hood housings
- Tough covers, hangers, and brackets
- Flame retardant parts for trains and buses










No secondary thermal cure required; simple, solvent cleaning.

[Get the full datasheet for Figure 4 Tough FR V0 Black here](#)

Figure 4[®] MED-AMB 10

Long term indoor and outdoor environmental stability

PROPERTIES:

-  Biocompatible capable per ISO 10993-5 and 10993-10
-  > 100 °C heat deflection temperature
-  HDT 110 °C HDT at 0.455MPa for MED-AMB 10
-  High tensile modulus
-  MPa 2800 MPa for MED-AMB 10
-  Long-term stability
-  Autoclavable

GOOD FOR:

- Surgical handles and surgical tooling
- General medical applications requiring biocompatibility, sterilization, and/or thermal resistance
- Parts requiring rigidity with high temperature resistance
- Parts with high definition details



Figure 4 MED-AMB 10 is a rigid, translucent amber material that can be used for visualization and fluid flow models. It offers excellent feature resolution and high definition parts for medical and industrial applications. It can be sterilized and tested at high temperatures.

[Get the full datasheet for Figure 4 MED-AMB 10 here](#)

Figure 4[®] MED-WHT 10

Long term indoor environmental stability

PROPERTIES:








-  Biocompatible capable per ISO 10993-5 and 10993-10
-  > 100 °C heat deflection temperature
-  102 °C HDT at 0.455MPa for MED-WHT 10
-  High tensile modulus
-  3000 MPa for MED-WHT 10
-  Long-term stability
-  Autoclavable

Figure 4 MED-WHT 10 is a rigid white material. It offers excellent feature resolution and high definition parts for medical and industrial applications. It can be sterilized and tested at high temperatures.

[Get the full datasheet for Figure 4 MED-WHT 10 here](#)

GOOD FOR:

- Surgical handles and surgical tooling
- General medical applications requiring biocompatibility, sterilization, and/or thermal resistance
- Parts requiring rigidity with high temperature resistance
- Parts with high definition details



Biocompatibility Statement

Test coupons of 3D Systems Figure 4 production-grade materials identified as biocompatible capable were printed and processed according to the post-processing instructions found within each relevant datasheet and provided to an external biological testing laboratory for evaluation in accordance with ISO 10993-5, Biological evaluation of medical devices - Part 5: Tests for in vitro cytotoxicity, and ISO 10993-10, Biological evaluation of medical devices - Part 10: Tests for irritation and skin sensitization (GPMT). Materials deemed biocompatible capable reflect materials with test results that passed the requirements for biocompatibility according to the tests listed.

It is the responsibility of each customer to determine that its use of Figure 4 production-grade materials is safe, lawful, and technically suitable to the intended application(s). Customers should conduct their own testing to ensure that this is the case. Because of possible changes in the law and in regulations, as well as possible changes in these materials, 3D Systems cannot guarantee that the status of these materials will remain unchanged or that it will qualify as biocompatible in any particular use. Therefore, 3D Systems recommends that customers continuing to use these materials verify their status on a periodic basis.

Additional Figure 4 production materials that meet biocompatibility standards include:

Figure 4 PRO-BLK 10

Figure 4 Rigid White

Figure 4 RUBBER-65A BLK

Figure 4 RUBBER-BLK 10

Figure 4 Rigid Gray

Figure 4 Tough 60C White

Figure 4 Tough 65C Black






Indirect Production



Figure 4[®] EGGSHELL-AMB 10

Process-optimized for silicone casting

PROPERTIES:

-  High tensile modulus (2800 MPa)
-  90 °C heat deflection temperature at 0.455 MPa
-  5% elongation at break

Specifically engineered to withstand liquid silicone injection at high temperature and pressure, with intentional brittleness to easily break away from silicone once the mold has been filled and cooled. Its amber color allows for visualization of the injected silicone.

[Get the full datasheet for Figure 4 EGGSHELL-AMB 10 here](#)

GOOD FOR:

- Casting silicone parts in multiple durometers
- Customized end-use and low volume production parts in silicone

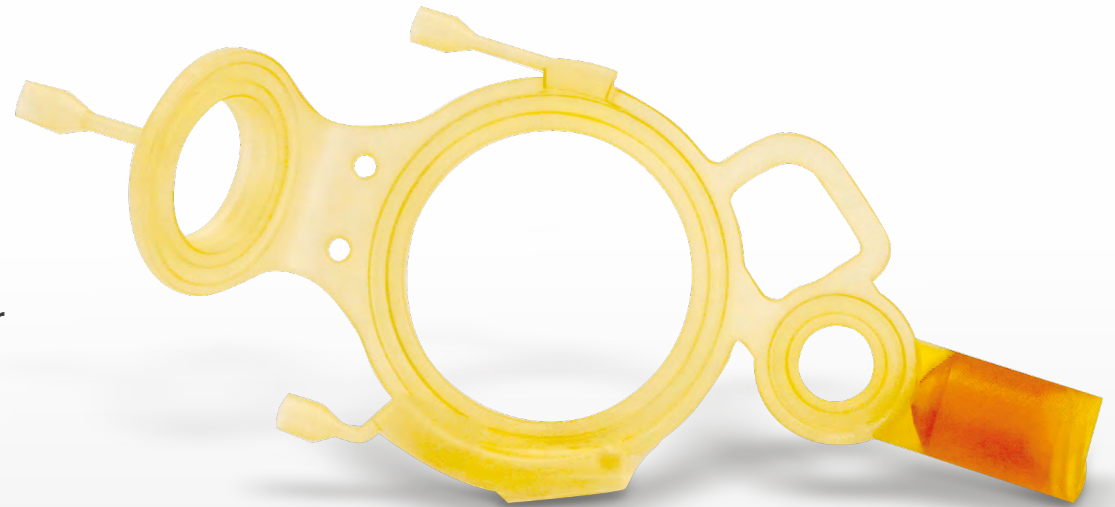


Figure 4[®] JEWEL MASTER GRY

Versatile high contrast gray resin

PROPERTIES:

-  High heat deflection temperature (up to 300 °C) compatible with a range of silicones
-  Stunning surface finish and excellent print quality available in 30 µm and 50 µm build styles
-  High contrast gray color shows fine details
-  Meets biocompatibility standard ISO 10933-5 for cytotoxicity

GOOD FOR:

- High definition master patterns for silicone and RTV molds
- Extended try-ons and fit tests
- Snap-fit and stone-in-place testing
- Design and functional prototyping




[Get the full datasheet for Figure 4 JEWEL-MASTER GRY here](#)



Figure 4[®] JCAST-GRN 20

Outstanding detail and resolution for jewelry casting


PROPERTIES:

-  High contrast green color
-  High detail and feature resolution
-  Suitable for a range of precious metals

GOOD FOR:

- Production of master patterns for gypsum investment casting of all types of jewelry
- Highly detailed models with properties that enable direct stone-setting
- Fully designed workflow to suit a wide range of jewelry styles

[Get the full datasheet for Figure 4 JCAST-GRN 20 here](#)

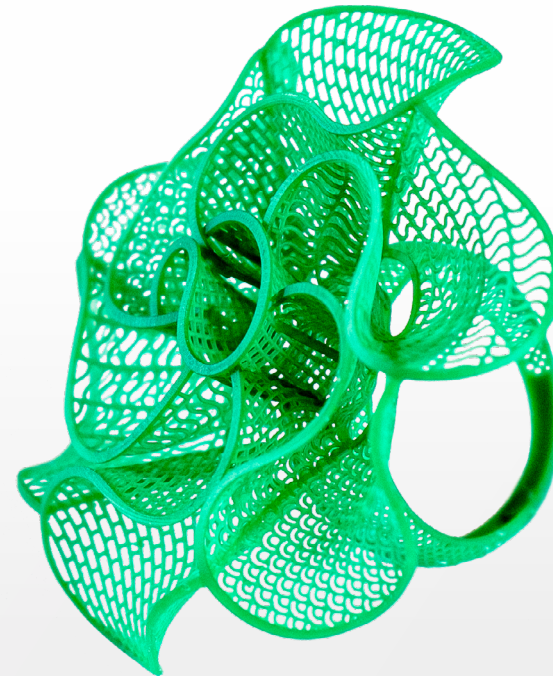



Prototyping

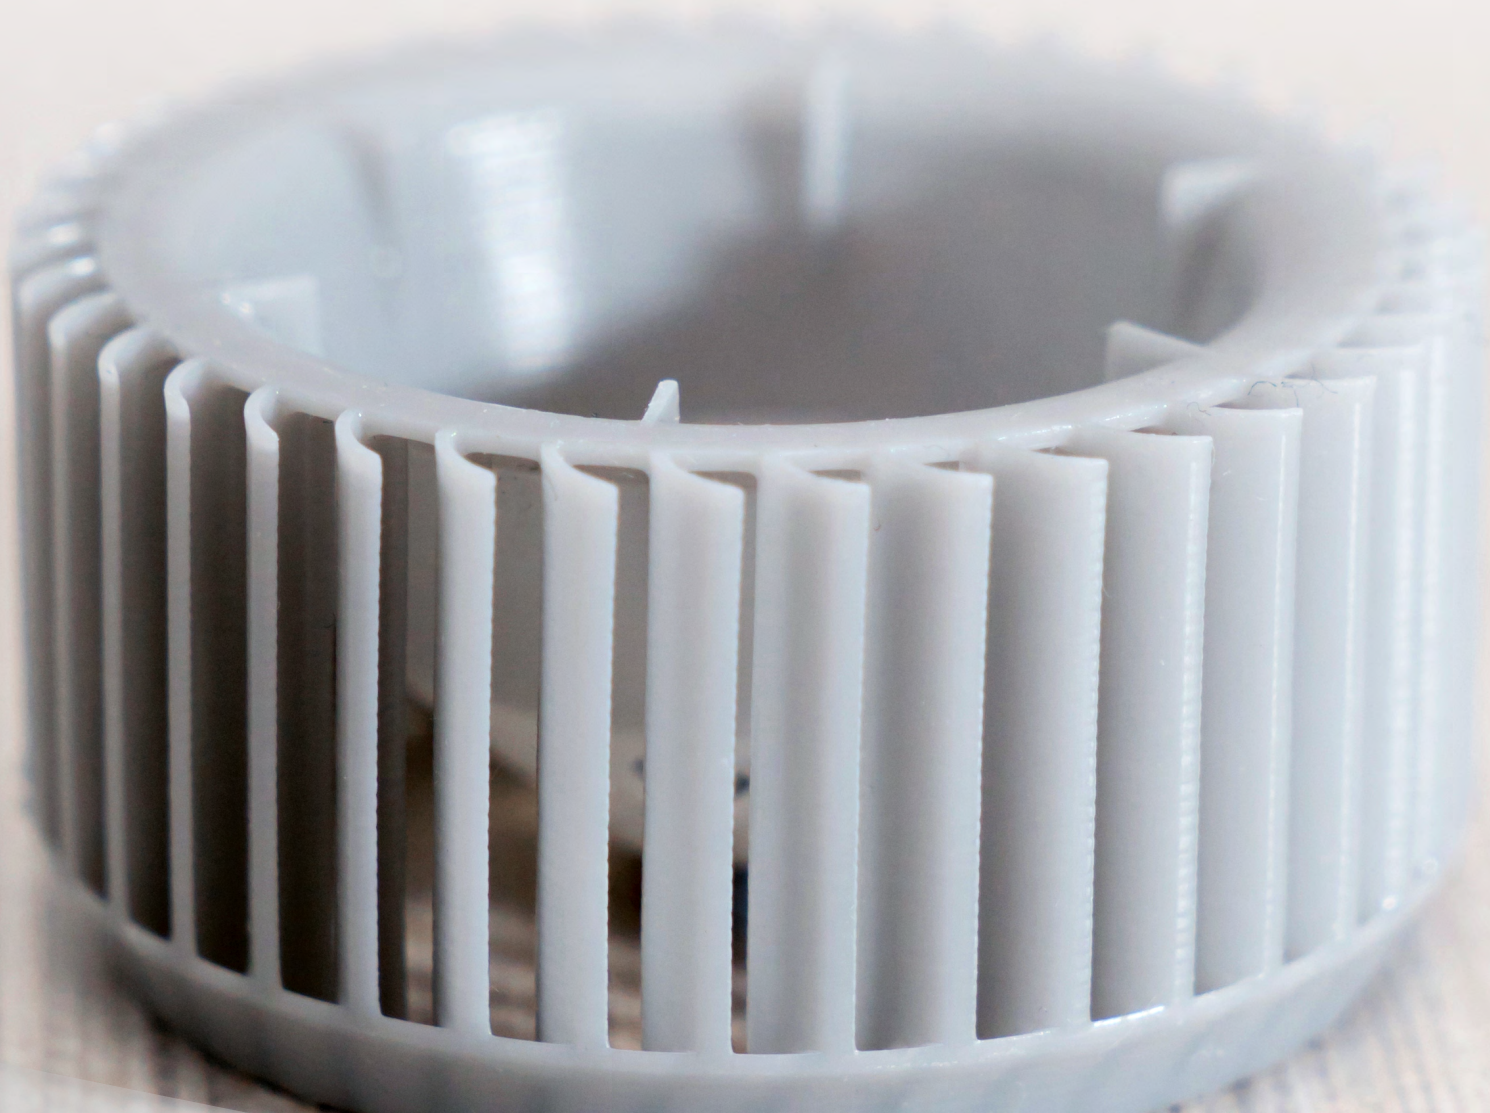


Figure 4® TOUGH-BLK 20, Figure 4® TOUGH-GRY 15

PROPERTIES:



Tough and durable

GOOD FOR:

High performance design and functional prototyping

Specific properties vary by material



FIGURE 4 TOUGH-BLK 20

Figure 4 TOUGH-BLK 20 is a rigid black plastic with industry-leading long-term environmental stability and excellent humidity and moisture resistance.

[Get the full datasheet for Figure 4 TOUGH-BLK 20 here](#)



FIGURE 4 TOUGH-GRY 15



Figure 4 TOUGH-GRY 15 is an economical material for the production of rigid gray parts.

[Get the full datasheet for Figure 4 TOUGH-GRY 15 here](#)

Figure 4® TOUGH-GRY 10

High speed printing

PROPERTIES:

-  Print speeds up to 100 mm/hr
-  25% elongation at break

GOOD FOR:

- Rapid design iteration
- Strong functional parts, including snap fits
- Master patterns for RTV molding or other uses

Ready for painting or plating, this dark gray plastic material is extremely stable, including under high humidity conditions, and offers exceptionally fast print speeds to advance product development.

[Get the full datasheet for Figure 4 TOUGH-GRY 10 here](#)



What's Next?

Interested in finding the right Figure 4 solution for your application?

Figure 4 EGGSHELL-AMB 10

Figure 4 FLEX-BLK 20

Figure 4 HI TEMP 300-AMB

Figure 4 High Temp 150°C FR Black

Figure 4 JCAST-GRN 20

Figure 4 JEWEL MASTER GRY

Figure 4 MED-AMB 10

Figure 4 MED-WHT 10

Figure 4 PRO-BLK 10

Figure 4 Rigid Composite White

Figure 4 Rigid Gray

Figure 4 Rigid White

Figure 4 RUBBER-65A BLK

Figure 4 RUBBER-BLK 10

Figure 4 Tough 60C White

Figure 4 Tough 65C Black

Figure 4 Tough 75C FR Black

Figure 4 Tough Clear

Figure 4 Tough FR V0 Black

Figure 4 TOUGH-BLK 20

Figure 4 TOUGH-GRY 10

Figure 4 TOUGH-GRY 15

Talk to an expert about which materials and printers would work for you

[Click here to get in touch](#)

Appendix A

Material and Printer Compatibility

Material	Certified Printers
Figure 4 EGGSHELL-AMB 10	S P 135
Figure 4 FLEX-BLK 20	S P
Figure 4 HI TEMP 300-AMB	S P 135
Figure 4 High Temp 150°C FR Black	S P 135
Figure 4 JCAST-GRN 20	S P 135 J
Figure 4 JEWEL MASTER GRY	S J
Figure 4 MED-AMB 10	S P
Figure 4 MED-WHT 10	S
Figure 4 PRO-BLK 10	S P 135
Figure 4 Rigid Composite White	P
Figure 4 Rigid Gray	S P
Figure 4 Rigid White	S P 135
Figure 4 RUBBER-65A BLK	S P
Figure 4 RUBBER-BLK 10	S P
Figure 4 Tough 60C White	S P
Figure 4 Tough 65C Black	S P
Figure 4 Tough 75C FR Black	S P 135
Figure 4 Tough Clear	S P

Material	Certified Printers
Figure 4 Rigid 140C Black	S
Figure 4 Tough FR V0 Black	S P 135
Figure 4 TOUGH-BLK 20	S P
Figure 4 TOUGH-GRY 10	S P
Figure 4 TOUGH-GRY 15	S P

S = Figure 4® Standalone

P = Figure 4® Production

135 = Figure 4® 135

J = Figure 4® Jewelry

Appendix B

Materials by Application

Concept and Draft	Design/Functionality	Medical/Hi TEMP	Direct Production	Indirect Production
TOUGH-GRY 10	TOUGH-BLK 20	HI TEMP 300 AMB	High Temp 150C FR Black	EGGSHELL-AMB 10
TOUGH-GRY 15		MED-AMB 10	Rigid Gray	JCAST-GRN 20
		MED-WHT 10	Rigid White	JEWEL MASTER GRY
			Rigid White Composite	
			Tough 60C White	
			Tough 65C Black	
			Tough 75C FR Black	
			Tough FR V0 Black	
			Tough Clear	
			PRO-BLK 10	
			RUBBER-65A BLK	
			RUBBER-BLK 10	
			FLEX-BLK 20	